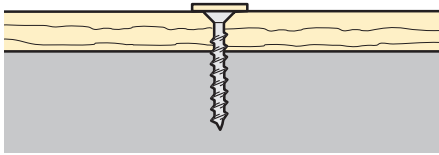
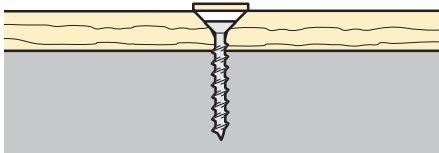
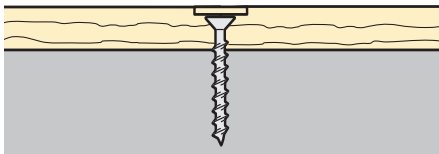


Self-adhesive moisture resistant covercap in a wide variety of colours, supplied in both plastic and real wood for optimal finish and fast mounting

A  The self-adhesive FastCap is mounted faster than traditional covercap systems

B  FastCap only need a few mm of surface area in order to stick

C  If FastCap is countersunk the fixing is completely hidden. Use special drill

 **Hard-wearing plastic**


 **Untreated real wood**


 **Lacquered real wood**


 **Advantages:**

- Easy fixing.
- Supplied in a large variety in both hard-wearing plastic, untreated- and lacquered real wood.
- Optimal finish.

How to countersinc FastCap:

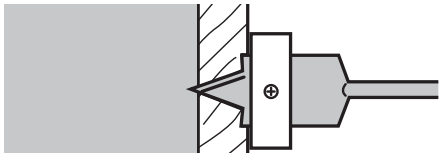
1  Drill a pilot hole and countersink for the FastCap in one operation

2  Install screw, anchor or nail

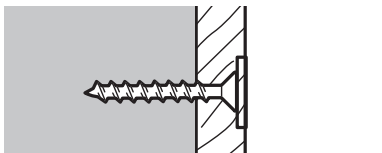3  Remove FastCap from sheet and mount it

 **Accessories:**

Special drill for countersinking FastCap. The drill has adjustable depth control, which makes it easy to drill a pilot hole and countersink at the same time.

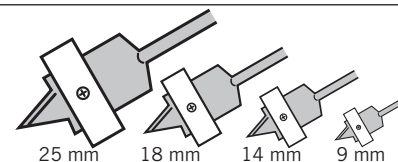

 **Special shapes and sizes:**

FastCap is also supplied in special shapes such as round or rigid with or without hole on request.




 **Further information:**

See overleaf.

 **Materials:**

FastCap is only 0,55 mm thick.
FastCap in plastic is produced in hard-wearing dyed through material.
FastCap in real wood is supplied either untreated or lacquered with a clear lacquer that does not yellow with age.



Standard assortment:

Hard-wearing plastic

Type	Dimensions			
	d _{nom}			
Expandet FastCap hard-wearing plastic	Diameter mm			
White	9	14	18	25
Antique white		14	18	
Light grey		14	18	
Grey	9	14	18	
Black		14	18	
Maple, white washed		14		
Light maple		14		
Beech		14		
Antique oak		14		
Golden oak		14		
Natural oak		14		
Mat cherry		14		
Dark cherry		14		
Dark mahogany		14		
Red mahogany		14		

Untreated real wood

Type	Dimensions	
	d _{nom}	
Expandet FastCap untreated real wood	Diameter mm	
Raw maple	14	
Ash	14	
White birch	14	
Natural birch	14	
Light oak	14	
Dark oak	14	
Pine	14	18
Veined pine	14	
Cherry	14	
Raw mahogany	14	
Raw teak	14	

Lacquered real wood

Type	Dimensions
	d _{nom}
Expandet FastCap lacquered real wood	Diameter mm
Maple	14
Dark oak	14
Golden pine	14
Cherry	14
Mahogany	14
Teak	14



EXPANDET SCREW ANCHORS A/S
Svendebuen 2-6
P.O. Box 59
DK-3230 Græsted
Denmark

Telephone: +45 70 22 79 79
Telefax: +45 70 22 79 89

Version 06.012

www.expandet.com
expandet@expandet.dk

Graphic: Vedkom /Expandet
©Expandet Screw Anchors A/S, 2006
All rights reserved